



Test Report: NSP-1600-36

1600W Power Supply with Single Output

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

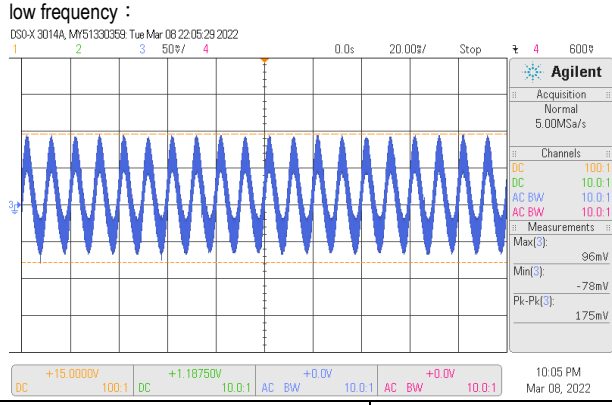
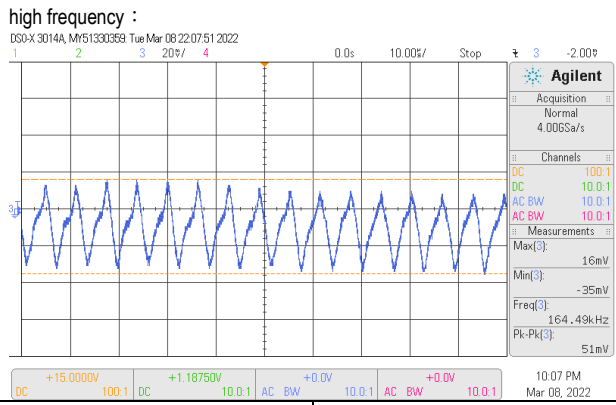
■ RELIABILITY TEST

ENVIRONMENT TEST

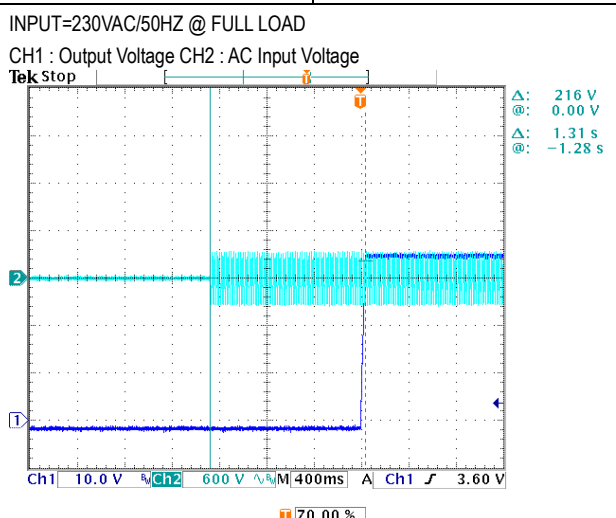
DESIGN VERIFY TEST

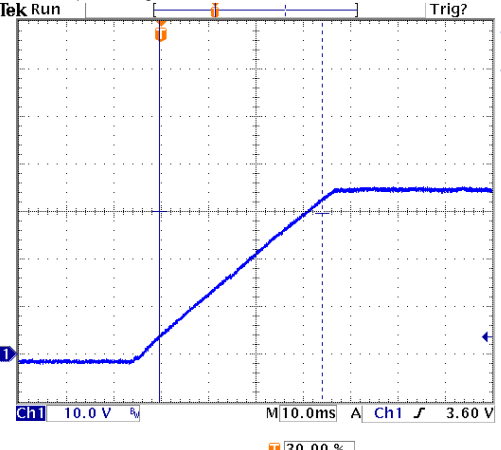
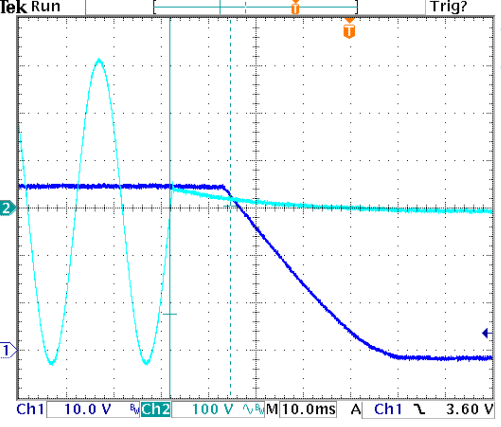
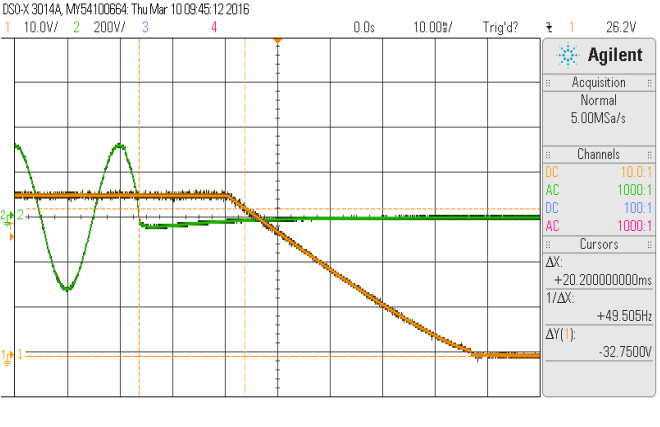
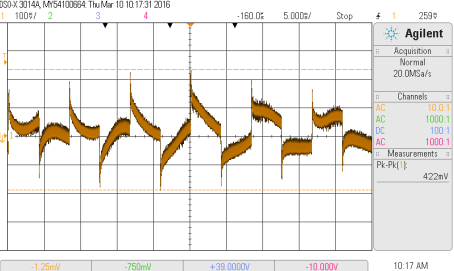
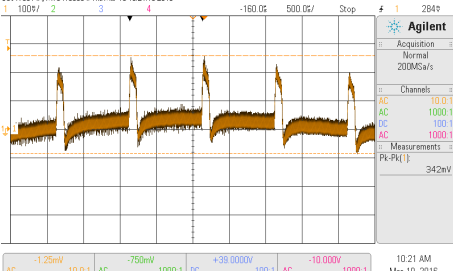
OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 35.5 V~ 45V	I/P : 230 VAC I/P : 90 VAC O/P : MIN LOAD Ta : 25°C	46.08V~34.19V/230VAC 46.08V~34.21V/90VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: 1%~-1%	I/P: 180VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1:-0.02%~ -0.02%
3	LINE REGULATION (Max)	V1: 0.5%~-0.5%	I/P: 180VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: -0.02%~-0.02%
4	LOAD REGULATION(Max)	V1: 0.5%~-0.5%	I/P: 230VAC O/P:FULL -MIN LOAD Ta:25°C	V1: 0%~0.02%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	0.43%
6	RIPPLE & NOISE(Max)	V1: 250 mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1:175 mVp-p



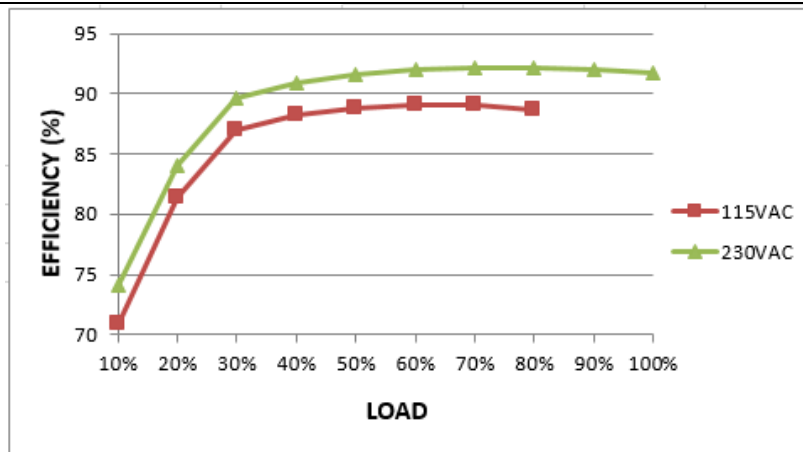
7	SET UP TIME(Max)	230VAC/1500ms	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	230VAC/ 1312 ms
---	------------------	---------------	---	-----------------



8 RISE TIME (Max)	230VAC/60ms	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	230VAC/34.4ms
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage</p>  <p> Δ: 400mV $\textcircled{}$: 30.0 V Δ: 34.4ms $\textcircled{}$: -400μs </p>			
9 HOLD UP TIME (Typ.)	230VAC/10ms /FULL LOAD 230VAC/16ms /70% LOAD	I/P : 230 VAC O/P : FULL LOAD /70% LOAD Ta : 25°C	230VAC/ 12.8 ms /FULL LOAD 230VAC/ 20.2 ms /70% LOAD
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH2 : AC Input Voltage</p>  <p> Δ: 228 V $\textcircled{}$: -224 V Δ: 12.8ms $\textcircled{}$: -38.2ms </p> <p>INPUT=230VAC/50HZ @70% LOAD</p> <p>CH1 : Output Voltage CH2 : AC Input Voltage</p>  <p> Δ: 26.2V Δ: +20.200000000ms Δ: +49.505Hz Δ: -32.7500V </p>			
10 DYNAMIC LOAD	V1: 3600 mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	422mVp-p 342mVp-p
<p>FULL /50% LOAD 50%DUTY / 120HZ</p>  <p> Δ: 422mV </p> <p>FULL /50% LOAD 50%DUTY / 1KHZ</p>  <p> Δ: 342mV </p>			

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																	
1	INPUT VOLTAGE RANGE	90V~264VAC 250VDC~ 400VDC	(1) I/P:TESTING O/P:FULL LOAD (2) I/P:DC TESTING(L:+ N:-) O/P: FULL / 50% LOAD (3) I/P:DC TESTING(L:- N:+) O/P: FULL / 50% LOAD (PLEASE CHECK DERATING CURVE) Ta:25°C	(1) 170 V~ 264 V 87V~264V (2) 250VDC~400VDC (3) 250VDC~400VDC																																	
			I/P: LOW-LINE-3V=87 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	TEST: OK																																	
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:90 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK																																	
3	INPUT CURRENT (Typ.)	230V/ 8.5 A 115V/ 15 A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD (PLEASE CHECK DERATING CURVE) Ta : 25°C	I=7.88A/ 230VAC I=12.45A/ 115VAC																																	
4	LEAKAGE CURRENT	<2 mA / 230 VAC	I/P : 230 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.76 mA N-FG : 0.76 mA																																	
5	POWER FACTOR (Typ.)	0.97 / 230VAC	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	PF=0.982/230VAC																																	
<p>PF vs LOAD</p> <table border="1"> <caption>PF vs LOAD Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>115VAC PF</th> <th>230VAC PF</th> </tr> </thead> <tbody> <tr><td>10%</td><td>0.98</td><td>0.86</td></tr> <tr><td>20%</td><td>0.99</td><td>0.94</td></tr> <tr><td>30%</td><td>0.99</td><td>0.96</td></tr> <tr><td>40%</td><td>0.99</td><td>0.97</td></tr> <tr><td>50%</td><td>0.99</td><td>0.975</td></tr> <tr><td>60%</td><td>0.99</td><td>0.975</td></tr> <tr><td>70%</td><td>0.99</td><td>0.975</td></tr> <tr><td>80%</td><td>0.99</td><td>0.975</td></tr> <tr><td>90%</td><td>0.99</td><td>0.975</td></tr> <tr><td>100%</td><td>0.99</td><td>0.975</td></tr> </tbody> </table>					LOAD (%)	115VAC PF	230VAC PF	10%	0.98	0.86	20%	0.99	0.94	30%	0.99	0.96	40%	0.99	0.97	50%	0.99	0.975	60%	0.99	0.975	70%	0.99	0.975	80%	0.99	0.975	90%	0.99	0.975	100%	0.99	0.975
LOAD (%)	115VAC PF	230VAC PF																																			
10%	0.98	0.86																																			
20%	0.99	0.94																																			
30%	0.99	0.96																																			
40%	0.99	0.97																																			
50%	0.99	0.975																																			
60%	0.99	0.975																																			
70%	0.99	0.975																																			
80%	0.99	0.975																																			
90%	0.99	0.975																																			
100%	0.99	0.975																																			
6	EFFICIENCY(Typ.)	91.5%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	91.68%																																	
<p>EFFICIENCY vs LOAD</p>																																					



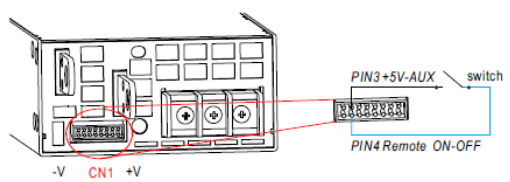
7	INRUSH CURRENT(Typ.) COLD START	230V/35 A	I/P : 230 VAC O/P : FULL LOAD Ta : 25°C	I=33A/ 230VAC T50= 2450 us/230V
<p>INPUT=230VAC/50HZ @ FULL LOAD CH4 : Input current CH3: Input AC</p>				

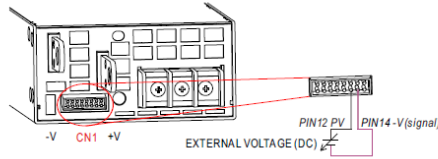
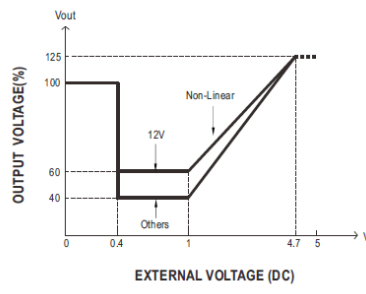
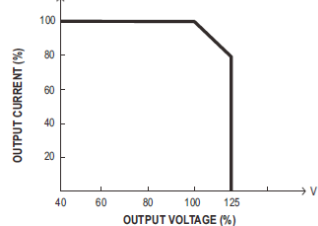
PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	105 %~ 115 % PROTECTION TYPE : Constant current limiting, unit will shut down o/p voltage after 5 sec. re-power on to recover	I/P: 264VAC I/P: 230VAC I/P: 180VAC O/P:TESTING Ta:25°C	110.74%/ 264VAC 110.46%/ 230VAC 110.69%/180VAC PROTECTION TYPE : Constant current limiting, unit will shut down o/p voltage after 5 sec. re-power on to recover
2	OVER VOLTAGE PROTECTION	47.2 V~ 56.3 V PROTECTION TYPE : Shut down o/p voltage, re-power on to recover	I/P: 264VAC I/P: 230VAC I/P: 90VAC O/P:MIN LOAD Ta:25°C	51.3V/ 264VAC 51.3V/ 230VAC 51.3V/ 90VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	NO DAMAGE PROTECTION TYPE : Shut down o/p voltage, recovers automatically after temperature goes down	I/P: 264VAC I/P: 180VAC O/P:FULL LOAD	O.T.P. Active PROTECTION TYPE : Shut down o/p voltage, recovers automatically after temperature goes down
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 90VAC O/P: FULL LOAD	NO DAMAGE PROTECTION TYPE :

	PROTECTION TYPE : Constant current limiting, unit will shut down o/p voltage after 5 sec. re-power on to recover	Ta:25°C	Constant current limiting, unit will shut down o/p voltage after 5 sec. re-power on to recover
--	---	---------	--

CONTROL FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																					
1	AUXILIARY POWER (AUX)	12V±10%@0.8A ripple:250mVp-p	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	11.32V/ 0.8 A /150 mVp-p																					
2	REMOTE ON/OFF CONTROL	<p>3. Remote ON-OFF Control ※ The power supply can be turned ON/OFF individually or along with other units by using the "Remote ON-OFF" function.</p>  <table border="1" data-bbox="1037 761 1484 862"> <thead> <tr> <th>Between Remote ON-OFF and +5V-AUX</th> <th>Power Supply Status</th> </tr> </thead> <tbody> <tr> <td>Switch Short</td> <td>ON</td> </tr> <tr> <td>Switch Open</td> <td>OFF</td> </tr> </tbody> </table> <p>I/P: 230 VAC O/P:FULL LOAD Ta:25°C Test Result :</p> <table border="1" data-bbox="462 1030 1069 1142"> <thead> <tr> <th>Between Remote ON-OFF and +5V-AUX</th> <th>Power Supply Status</th> </tr> </thead> <tbody> <tr> <td>SW SHORT</td> <td>ON</td> </tr> <tr> <td>SW OPEN</td> <td>OFF</td> </tr> </tbody> </table>	Between Remote ON-OFF and +5V-AUX	Power Supply Status	Switch Short	ON	Switch Open	OFF	Between Remote ON-OFF and +5V-AUX	Power Supply Status	SW SHORT	ON	SW OPEN	OFF											
Between Remote ON-OFF and +5V-AUX	Power Supply Status																								
Switch Short	ON																								
Switch Open	OFF																								
Between Remote ON-OFF and +5V-AUX	Power Supply Status																								
SW SHORT	ON																								
SW OPEN	OFF																								
3	REMOTE SENSE	S+ / S- 0.3V~0.5V Compensate voltage drop on the load wiring up to 0.5V.	I/P: 230 VAC O/P:FULL LOAD Ta:25°C	0.3V~0.5V																					
4	ALARM SIGNAL	<p>1. DC OK SIGNAL High (3.5 ~ 5.5V) : When the $V_{out} \leq 77\% \pm 5\%$. Low (-0.5 ~ 0.5V) : When $V_{out} \geq 80\% \pm 5\%$. The maximum sourcing current is 10mA and only for output. (Note.2) I/P: 230 VAC O/P:FULL LOAD Ta:25°C Test Result :</p> <table border="1" data-bbox="510 1568 1085 1680"> <thead> <tr> <th>Vout</th> <th>DC OK SIGNAL</th> </tr> </thead> <tbody> <tr> <td>$V_{out} \leq 72\%$</td> <td>5V</td> </tr> <tr> <td>$V_{out} \geq 85\%$</td> <td>-0.09V</td> </tr> </tbody> </table> <p>2. T-ALARM</p> <table border="1" data-bbox="526 1702 1117 1803"> <thead> <tr> <th>P.S.U STATUS</th> <th>Vo</th> <th>T-ALARM</th> </tr> </thead> <tbody> <tr> <td>NORMAL</td> <td>100%±2%</td> <td>-0.5 ~0.5V</td> </tr> <tr> <td>OTP OR FAN LOCK</td> <td>0V</td> <td>3.5~5.5V</td> </tr> </tbody> </table> <p>I/P: 230 VAC O/P:FULL LOAD Ta:25°C Test Result :</p> <table border="1" data-bbox="526 1881 1101 1993"> <thead> <tr> <th>P.S.U STATUS</th> <th>T-ALARM</th> </tr> </thead> <tbody> <tr> <td>NORMAL</td> <td>0.01 V</td> </tr> <tr> <td>OTP OR FAN LOCK</td> <td>5.38V</td> </tr> </tbody> </table>	Vout	DC OK SIGNAL	$V_{out} \leq 72\%$	5V	$V_{out} \geq 85\%$	-0.09V	P.S.U STATUS	Vo	T-ALARM	NORMAL	100%±2%	-0.5 ~0.5V	OTP OR FAN LOCK	0V	3.5~5.5V	P.S.U STATUS	T-ALARM	NORMAL	0.01 V	OTP OR FAN LOCK	5.38V		
Vout	DC OK SIGNAL																								
$V_{out} \leq 72\%$	5V																								
$V_{out} \geq 85\%$	-0.09V																								
P.S.U STATUS	Vo	T-ALARM																							
NORMAL	100%±2%	-0.5 ~0.5V																							
OTP OR FAN LOCK	0V	3.5~5.5V																							
P.S.U STATUS	T-ALARM																								
NORMAL	0.01 V																								
OTP OR FAN LOCK	5.38V																								

<p>5 OUTPUT VOLTAGE PROGRAMMABLE(PV)</p>	<p>2. Output Voltage Programming (or, PV / remote voltage programming / remote adjust / margin programming / dynamic voltage trim) ※ In addition to the adjustment via the built-in potentiometer, the output voltage can be trimmed by applying EXTERNAL VOLTAGE.</p>  <div style="display: flex; justify-content: space-around;">   </div> <p style="text-align: center;">EXTERNAL VOLTAGE (DC)</p> <p>⊙ The rated current should change with the Output Voltage Programming accordingly. ⊙ For Remote Sense / Local Sense, please refer to "Voltage Drop Compensation" section.</p> <p>I/P: 230 VAC O/P: FULL LOAD Ta: 25°C Test Result :</p> <table border="1" style="width: 100%; text-align: center;"> <tr> <td style="width: 15%;"></td> <td style="width: 15%;">PV</td> <td style="width: 20%;">$<0.4V$</td> <td style="width: 20%;">1V</td> <td style="width: 20%;">5V</td> </tr> <tr> <td>MODEL</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>SPEC</td> <td></td> <td>36V\pm5%</td> <td>14.4V\pm5%</td> <td>45V\pm5%</td> </tr> <tr> <td>Vout</td> <td></td> <td>36.01V</td> <td>14.5V</td> <td>45.5V</td> </tr> </table>		PV	$<0.4V$	1V	5V	MODEL					SPEC		36V \pm 5%	14.4V \pm 5%	45V \pm 5%	Vout		36.01V	14.5V	45.5V
	PV	$<0.4V$	1V	5V																	
MODEL																					
SPEC		36V \pm 5%	14.4V \pm 5%	45V \pm 5%																	
Vout		36.01V	14.5V	45.5V																	

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q901 Rated 37A/600V	I/P: High-Line +3V = 267V AC ON/OFF VDS: O/P: (1) Full Load (2) Output Short (3) Dynamic Load Full Load/ Min. Load 90% Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90% Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90% Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50% Duty/120Hz (7) 0% → 400% Load. Ta: 25°C	VDS: (1) 469V (2) 448V (3) 428V (4) 432V (5) 432V (6) 432V (7) 436V
2	P.F.C Transistor (D to S) or (C to E) Peak Voltage	Q52 Rated 52A/ 600V	I/P: High-Line +3V = 267 V AC ON/OFF O/P: (1) Full Load	VDS: (1) 457V/19.1A

			(2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	(2) 408V/18.7A (3)440 V/14.2A (4)444 V/14.6A (5)457 V/13.4A (6)428V/10.3A (7)412V/11.1A
3	Diode Peak Voltage	Q101 Rated 65A/200V Q104 Rated 65A/200V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD Ta:25°C	Q101: Q104: VDS: VDS: (1)140V (1)140V (2)136V (2)136V (3)138V (3)136V (4)138V (4)140V (5)140V (5)138V (6)136V (6)134V (7)136V (7)138V (8)142V (8)140V
4	Input Capacitor Voltage	C5 Rated: 680μ/400 V	I/P:High-Line +3V =267 V O/P: (1)Full Load Ta:25°C	(1)389V
5	Control IC Voltage Test	PWM IC U901 Rated 6.5 V~24V PFC IC U51 Rated 4.5V~ 15V	I/P:High-Line +3V =267 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. Ta:25°C	(1) 14.4V (2) 15.0V (3) 14.8V (4) 13.2V (1)13.6V (2)13.4V (3)13.4V (4)13.4V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG :2KVAC/min O/P-FG:1.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.8 KVAC/min Ta:25°C	I/P-O/P:7.31mA I/P-FG:7.08mA O/P-FG:7.51m A NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 20.1GΩ I/P-FG: 15.9GΩ O/P-FG:27.4 GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	17 mΩ

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:100% LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS A	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR : 8KV / Contact : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare Any contradictions of the test results, please refer to the latest EMC test report			

■ **RELIABILITY TEST**

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	TEMPERATURE RISE TEST	MODEL : NSP-1600-24 1. ROOM AMBIENT BURN-IN : 1 HRS I/P : 230VAC O/P : FULL LOAD Ta= 25°C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta= 50°C		

		NO	Position	ROOM AMBIENT Ta= 25°C	HIGH AMBIENT Ta= 50 °C
		1	BD1	44.7°C	71.0°C
		2	Q52	56.9°C	84.6°C
		3	D50	60.6°C	88.9°C
		4	Q904	55.6°C	84.7°C
		5	T1	71.4°C	103.7°C
		6	Q101	66.7°C	97.7°C
		7	T301	52.8°C	81.6°C
		8	D321	58.6°C	88.9°C
		9	U82	65.8°C	89.1°C
		10	RTH21	52.6°C	79.0°C
		11	C5	39.4°C	64.0°C
		12	L100	78.0°C	102.3°C
		13	RTH9	41.6°C	66.8°C
		14	L900	64.6°C	90.0°C
		15	RG301	23.7°C	50.0°C
		16	L2	45.4°C	73.0°C
		17	C104	32.3°C	59.1°C
		18	D952	53.8°C	83.1°C
		19	D301	71.1°C	99.0°C
		20	U602	27.1°C	53.3°C
		21	U901	46.3°C	72.7°C
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)		I/P : 230 VAC O/P : 109% LOAD Ta : 25°C	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR		I/P : 230VAC/180VAC O/P : 100 % LOAD Ta= -25°C	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE		I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0~50°C)		I/P : 230 VAC O/P : FULL LOAD	± 0.002 %/°C (0~50°C)
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC			OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -25°C~ +55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST(13500 TIMES) 1cycle:230V/ FULL LOAD Burn In Test			OK



8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 12min/sweep cycle (4) Acceleration : 2G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C101 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 50°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50°C LIFE TIME	(1) 2128159HRS (2) 332080HRS (3) 465662HRS (4) 543665HRS
10	MTBF	Conducted by Parts Stress Analysis Prediction 684.7K hrs min. Telcordia SR-332 (Bellcore) ; 69.2K hrs min. MIL-HDBK-217F (25°C)	
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	DANIEL GAO	SANFORD SU	VINCENT TSENG

2020.10.1 TAG-QA-009